

ProActive Rear Door Cooler^{By} USystems

A brand of **Legend**

CL20

The Rear Door Coolers are highly efficient cooling systems for use on data center/server cabinets. Designed to operate on a closed loop water circuit, ensuring optimum thermal and energy performance by removing heat generated by the active equipment directly at source.

This single source solution replaces the traditional approach to data center cooling and permits load removal of over 90kW per cabinet, therefore has the capability to withstand low medium and the higher density demands experienced today.

The solution means that hot/cold aisles are no longer necessary therefore allowing customers to capitalise on the use of actual real estate within the data hall, permitting alternate room layout and enhanced scalability possibilities.

Low to High Density
Over 90kW cooling capacity per cabinet



Performance Examples

Performance examples—these three examples are showing the same RDC but with differing duties attainable when regulating or changing the water temperature. Other performance duties are attainable when calculating bespoke project specific requirements.

Maximum Duty

Our highest duties based on 14°C water inlet – to avoid condensation – and wide ΔT to deliver reasonable DC temperatures. This deployment would require the use of mechanically cooled external plant but has the ability to offer exceptional cooling capacities per cabinet.

CL20 Cooling Capacity		5 Fan	6 Fan
Maximum Duty	kW	62	93
Air flow (50Hz 230v)	m ³ /h (cfm)	6847 (4030)	8217 (4836)
DB Air On	°C (°F)	50 (122)	58 (136)
DB Air Out	°C (°F)	20 (68)	20 (68)
Water In	°C (°F)	14 (57.2)	14 (57.2)
Water Out	°C (°F)	25 (77)	30 (86)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	5 (1.4) / 22	5 (1.4) / 22
Fluid Velocity	m/s (ft/s)	0.99 (3.25)	0.82 (2.7)

Nominal Duty

This is a more general, workable duty with 18°C water inlet and covers most requirements in Europe while also maintaining an acceptable room temperature of 24°C. Operating with wide water ΔT also allows for lower power draw of the mechanically cooled external plant, reducing CapEx and OpEx costs while delivering leading cooling capacities per cabinet.

CL20 Cooling Capacity		5 Fan	6 Fan
Nominal Duty	kW	55	80
Air flow (50Hz 230v)	m ³ /h (cfm)	6847 (4030)	8217 (4836)
DB Air On	°C (°F)	50 (122)	55 (131)
DB Air Out	°C (°F)	23 (73.4)	22 (71.6)
Water In	°C (°F)	18 (64.4)	18 (64.4)
Water Out	°C (°F)	28 (82.4)	32 (89.6)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	5 (1.4) / 22	5 (1.4) / 22
Fluid Velocity	m/s (ft/s)	0.99 (3.25)	0.82 (2.7)

Efficient Duty

Taking advantage of the higher allowable room temperatures in a DC of 27°C/80.6°F allows the use of higher water temperatures, therefore reducing the infrastructure required for mechanical cooling, and allows for most or all-day free cooling. This will provide customers with higher efficiency cooling and lower running costs thus beginning to obtain a return on their investment while maximising real estate.

CL20 Cooling Capacity		5 Fan	6 Fan
Efficient Duty	kW	50	74
Air flow (50Hz 230v)	m ³ /h (cfm)	6847 (4030)	8217 (4836)
DB Air On	°C (°F)	50 (122)	55 (131)
DB Air Out	°C (°F)	26 (79)	25 (77)
Water In	°C (°F)	21 (69.8)	21 (69.8)
Water Out	°C (°F)	30 (86)	34 (93.4)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	5 (1.4) / 22	5 (1.4) / 22
Fluid Velocity	m/s (ft/s)	0.99 (3.25)	0.82 (2.7)

Cooling capacity data is shown for illustration purposes. USystems work alongside their customers who largely have unique challenges and ambitions. The nature of our technology, capabilities and approach is emulated in the delivery of efficient designs and solutions across the globe.

Legend

DB - Dry Bulb

ΔT - Delta T / difference supply and return temperatures

Air On - Air onto coil / air off active equipment


Air Off - Air off coil / air out from USystems cooler

Technical Data

		CL20 ProActive (including interface frame)									
To Suit:		42U 5 fan			48U* 5 fan			48U* 6 fan		52U 6 fan	
		600w	750w	800w	600w	750w	800w	750w	800w	750w	800w
Height	mm (")	2040 (80.3)			2307 (90.8)			2307 (90.8)		2485 (97.8)	
Width	mm (")	596 (23.5)	746 (29.4)	796 (31.3)	596 (23.5)	746 (29.4)	796 (31.3)	746 (29.4)	796 (31.3)	746 (29.4)	796 (31.3)
Depth	mm (")	380 (15)			380 (15)			380 (15)		380 (15)	
Fits Rack	U x mm (")	42 x 600 (23.6)	42 x 750 (29.5)	42 x 800 (31.5)	48* x 600 (23.6)	48* x 750 (29.5)	48* x 800 (31.5)	48* x 750 (29.5)	48* x 800 (31.5)	52 x 750 (29.5)	52 x 800 (31.5)
Dry Weight	kg (lb)	86 (189.6)	105.5 (232.6)	112 (247)	94 (207.3)	120 (264.6)	126.5 (278.9)	131.4 (289.7)	137.9 (304.1)	136.9 (301.9)	143.4 (316.2)
Dry Weight (including frame)	kg (lb)	112.7 (248.5)	133.7 (294.8)	140.7 (310.2)	123.3 (271.9)	150.8 (332.5)	157.8 (347.9)	162.2 (357.7)	169.2 (373.1)	169.4 (373.5)	176.4 (389)
Wet Weight (including frame)	kg (lb)	123.7 (272.8)	144.7 (319.1)	151.7 (334.5)	134.3 (296.1)	161.8 (356.8)	169.8 (374.4)	177.6 (391.6)	184.6 (407)	184.8 (407.5)	191.8 (422.9)
Paint (finalised on order)		RAL 7035 (Light Grey)									
		RAL 9005 (Black)									
Communication Protocol		Modbus over TCP/IP									
		(BACnet, SNMP optional)									
Hinge Side		Left-Hand Side - standard									
		Right-Hand Side - available on request									
Connections	mm (")	25 (1)									
Water Volume Capacity	L (USG)	11 (2.9)					15.4 (4)				
Maximum RDC Current Draw	A	9.5									

*48U RDC, and 48U frame fit 47/48U rack

CL20 Combined Fan Performance**				
Type		Backward Curved Centrifugal		
Number of fans		5	6	
Air flow	m ³ /h (CFM)	30%	2135 (1257)	2553 (1502)
		70%	5262 (3097)	6293 (3703)
		100%	6871 (4044)	8217 (4836)
Current 50Hz 230v / 60Hz 208v	A	30%	0.65 / 0.72	0.79 / 0.87
		70%	3.71 / 4.09	4.46 / 4.92
		100%	7.54 / 8.33	9.04 / 9.98
Power Input 50Hz 230v	W	30%	51	61
		70%	398	478
		100%	845	1014
Total fan noise	dB	30%	69	67
		70%	85	83
		100%	90	89

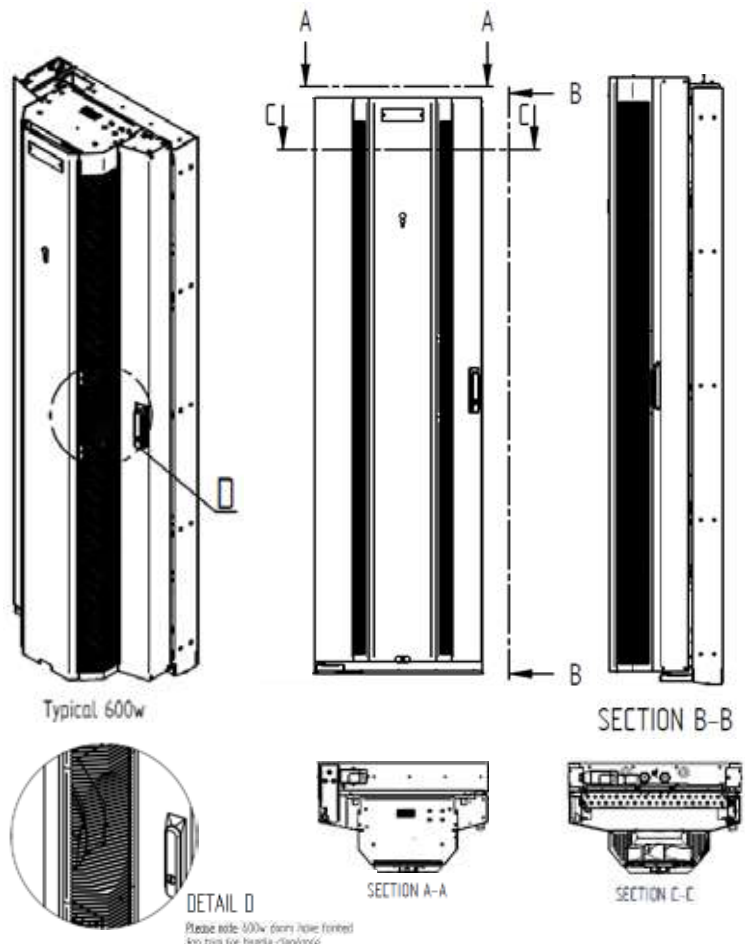

**Based on positive pressure environment. PF 1. Others may vary.

Further Documentation

For additional information, please refer to the below. Available through your USystems representative, or our central enquires line at sales@usystems.com

Complete Product Range

Operations and Maintenance Manual

Troubleshooting Guide

Product Brochure

Available at www.usystems.com

Please contact sales@usystems.com

Please contact sales@usystems.com

Available at www.usystems.com



by **USystems**
A brand of **legrand**

We engineer for a sustainable tomorrow.

Legrand (S) Pte Ltd

17 Neythal Road,
Singapore 628582
Tel: + 65 6416 1550
Fax: + 65 6416 1580



**DATA CENTER
SOLUTIONS**

CABLOFIL

USystems

Starline

Raritan

**Server
Technology**