

HPC ProActive Rear Door Cooler

By **USystems**
A brand of **Legend**

CL23

These Rear Door Coolers are established as high ability & efficient cooling systems for use on data center/server racks. Designed to operate on a closed loop water circuit, ensuring optimum thermal and energy performance by removing heat generated by the active equipment directly at source.

Designed to meet the challenging demands of High-Performance Compute (HPC) cooling, USystems with its unique RDC has positioned itself alongside water to the chip and immersion cooling technologies, the CL23 HPC which is capable of an unrivalled 200kW of sensible cooling per industry standard rack.

Unlike other high performing cooling technologies, the RDC requires no specialist infrastructure in the data center, no specialist servers, is fitted to standard IT racks, has retrofit capability, only occupies a small footprint, is easy to install and simple to roll out the CL23 HPC is unquestionably cost effective on all levels.

The CL23 HPC by design is capable of controlling the whole room environment without any additional cooling apparatus, unlike equivalent technologies. In addition, this RDC Solution offers significant capital expenditure savings and with an EER in excess of 100 at maximum duty the CL23 HPC provides a better operational expenditure too.



Over 200kW In A Single Rack

Performance Examples

Performance examples—these three examples are showing the same RDC but with differing duties attainable when regulating or changing the water temperature. Other performance duties are attainable when calculating bespoke project specific requirements.

Maximum Duty

Our highest duties offer unrivalled High Performance Cooling (HPC) based on an Industry Standard 14/20°C (57.2/68°F) water supply/return from mechanically cooled external plant, and has the ability to offer exceptional cooling capacities of over 200kW per rack.

Cooling Capacity CL23 HPC		
Maximum Duty	kW	204
Air flow (50Hz 230v)	m ³ /h (cfm)	14229 (8375)
DB Air On	°C (°F)	65 (149)
DB Air Out	°C (°F)	15 (59)
Water In	°C (°F)	14 (57.2)
Water Out	°C (°F)	20 (68)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	29.38 (8.16) / 129.36
Fluid Velocity	m/s (ft/s)	4.84 (15.88)

Nominal Duty

This is a more general, workable duty with 20°C/68°F water inlet and covers most requirements in Europe while also maintaining a room temperature of 22.5°C/72.5°F. Operating with wide water ΔT also allows for lower power draw of the mechanically cooled external plant, reducing CapEx and OpEx costs while delivering leading cooling capacities up to 177kW per rack.

Cooling Capacity CL23 HPC		
Nominal Duty	kW	177
Air flow (50Hz 230v)	m ³ /h (cfm)	14229 (8375)
DB Air On	°C (°F)	65 (149)
DB Air Out	°C (°F)	22.5 (72.5)
Water In	°C (°F)	20 (68)
Water Out	°C (°F)	30 (86)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	15.27 (4.27) / 67.23
Fluid Velocity	m/s (ft/s)	2.51 (8.23)

Efficient Duty

Taking advantage of room temperatures of 26°C/78.8°F allows the use of higher water temperatures, therefore reducing the necessity of mechanical cooling and allows for most or all-day free cooling. This will provide customers with higher efficiency cooling and lower running costs thus beginning to obtain a return on their investment while maximising real estate. The loss in cooling capacity in comparison to the nominal performances is negligible.

Cooling Capacity CL23 HPC		
Efficient Duty	kW	164
Air flow (50Hz 230v)	m ³ /h (cfm)	14229 (8375)
DB Air On	°C (°F)	65 (149)
DB Air Out	°C (°F)	26 (78.8)
Water In	°C (°F)	23 (73.4)
Water Out	°C (°F)	33 (91.4)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	14.2 (3.94) / 62.56
Fluid Velocity	m/s (ft/s)	2.34 (7.68)

Cooling capacity data is shown for illustration purposes. USystems work alongside their customers who largely have unique challenges and ambitions. The nature of our technology, capabilities and approach is emulated in the delivery of efficient designs and solutions across the globe.

Legend

DB - Dry Bulb

ΔT - Delta T / difference supply and return temperatures


Air On - Air onto coil / air off active equipment

Air Off - Air off coil / air out from Usystems cooler

Technical Data




CL23 HPC			
Technical information		To Suit 48U*	To Suit 52U
Height (X)	mm (")	2303 (90.7)	2481 (97.7)
Width (B)	mm (")	799 (31.5)	
Depth (C)	mm (")	415 (16.3)	
Dry Weight	kg (lb)	150 (330)	163 (358)
Wet Weight	kg (lb)	172 (379)	185 (406)
Paint	Finalised on Order	RAL 7035 (Light Grey)	
		RAL 9005 (Black)	
Communication Protocol		MODBus over TCP/IP (BACnet, SNMP optional)	
Hinge Side		Left-Hand side - Standard	
		Right-Hand side - on request	
Connections	mm (inch)	32 (1 1/4)	
Water Volume Capacity	L (USGal)	22 (5.75)	
Maximum RDC Current Draw	A	16	

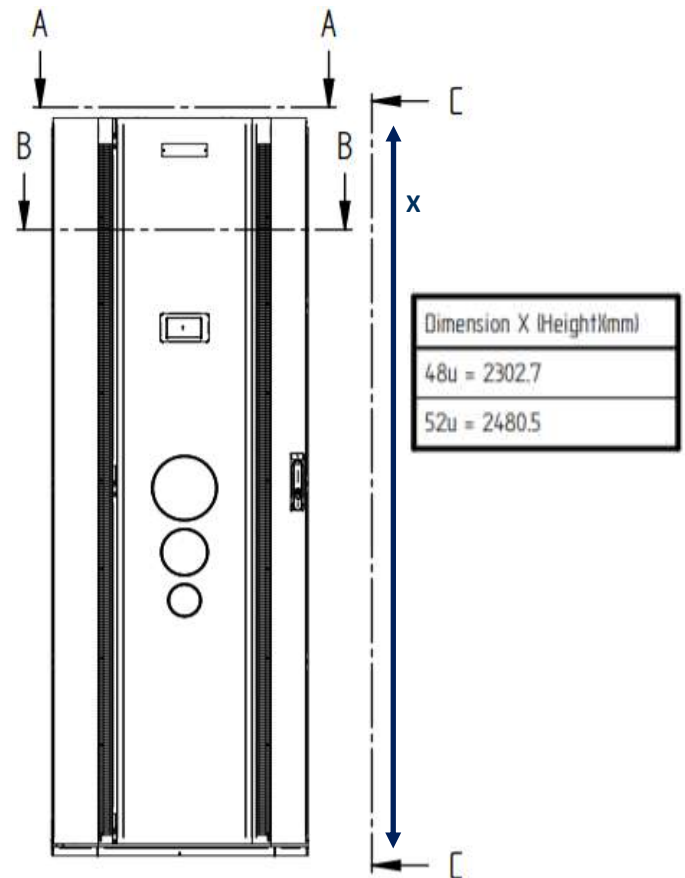

*48U RDC, and 48U frame fit 47U/48U rack

CL23 HPC Combined Fan Performance**			
10 x Backward Curved Centrifugal			
Air flow	m ³ /h (cfm)	30%	4375 (2575)
		70%	10750 (6327)
		100%	14215 (8367)
Current 50Hz 230v / 60Hz 208v	A	30%	1.32 / 1.46
		70%	7.16 / 7.92
		100%	15.06 / 16.65
Power Input 50/60Hz 200-240v	W	30%	113
		70%	776
		100%	1691
Total fan noise	dB	30%	68
		70%	85
		100%	92

**Based on positive pressure environment. PF 1. Others may vary.

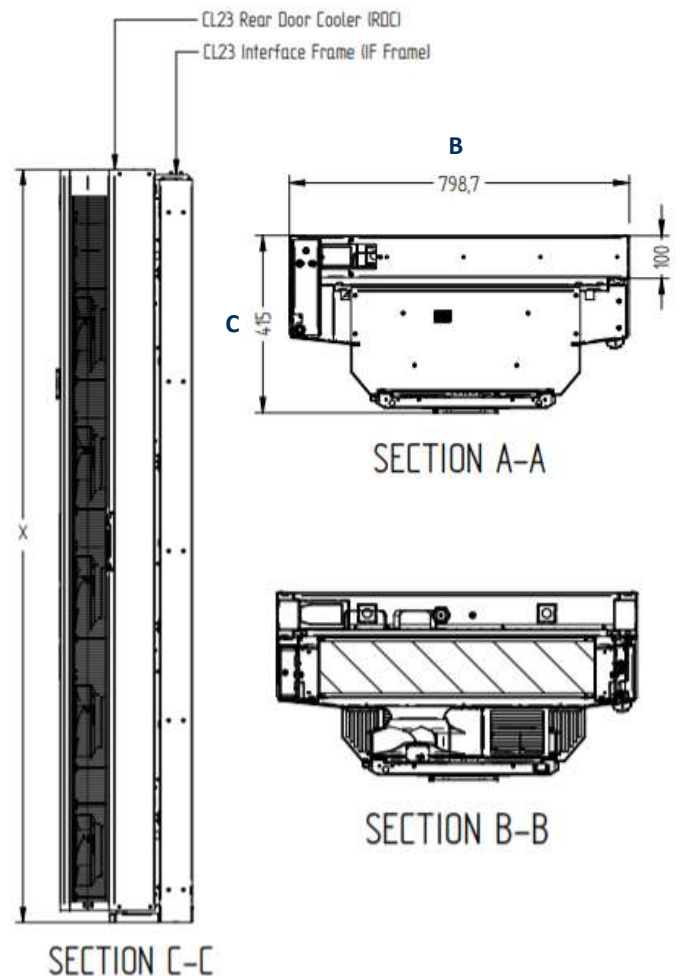

Further Documentation

For additional information, please refer to the below. Available through your USystems representative, or our central enquires line at sales@usystems.com

Complete Product Range

Operations and Maintenance Manual

Troubleshooting Guide

Product Brochure

Available at www.usystems.com

Please contact sales@usystems.com

Please contact sales@usystems.com

Available at www.usystems.com



by **USystems**
A brand of **legrand**

We engineer for a sustainable tomorrow.

Legrand (S) Pte Ltd

17 Neythal Road,
Singapore 628582
Tel: + 65 6416 1550
Fax: + 65 6416 1580



DATA CENTER
SOLUTIONS

CABLOFIL

USystems

Starline

Raritan

Server
Technology