

Keor SPX UPS



THE IDEAL SOLUTION FOR
ELECTRICAL NETWORK
DISTURBANCES

THE GLOBAL SPECIALIST IN ELECTRICAL AND DIGITAL
BUILDING INFRASTRUCTURES

 **legrand**

Keor SPX

Uninterruptible power supplies (UPS)



3 103 00

3 103 02

Single-phase UPS for computers and audio and video equipment
 Complete protection: discharge, overload, short-circuit, thermal protection
 Supply button / LED indicators: provides a visual and audible indication of the UPS status
 The UPS is protected against overload and short circuit by a fuse or resettable circuit breaker based on the model.
 Automatic start-up: when there is no mains supply or it is of poor quality, the UPS continues working using a battery and switches off if the network breaking time exceeds the back-up time

Pack	Cat. Nos.	UPS - German standard (type F) input cord				
		Nominal power (VA)	Active power (W)	Back-up time (min)	Number of multistandard outlets	Communication ports
1	310300	600	360	8 to 10	2	-
1	310301	800	480	8 to 10	2	-
1	310302	1000	600	8 to 10	4	USB
1	310303	1500	900	8 to 10	4	USB
1	310304	2000	1200	8 to 10	4	USB

		UPS - US standard (type B) input cord				
		Nominal power (VA)	Active power (W)	Back-up time (min)	Number of multistandard outlets	Communication ports
1	310305	600	360	8 to 10	2	-
1	310306	800	480	8 to 10	2	-
1	310307	1000	600	8 to 10	4	USB
1	310308	1500	900	8 to 10	4	USB
1	310309	2000	1200	8 to 10	4	USB

		UPS - British standard (type G) input cord				
		Nominal power (VA)	Active power (W)	Back-up time (min)	Number of multistandard outlets	Communication ports
1	310315	600	360	8 to 10	2	-
1	310316	800	480	8 to 10	2	-
1	310317	1000	600	8 to 10	4	USB
1	310318	1500	900	8 to 10	4	USB
1	310319	2000	1200	8 to 10	4	USB

		UPS - German standard (type F) input cord				
		Nominal power (VA)	Active power (W)	Back-up time (min)	Number of IEC C13 outlets	Communication ports
1	310320	600	360	8 to 10	4	-
1	310321	800	480	8 to 10	4	-
1	310322	1000	600	8 to 10	6	USB
1	310323	1500	900	8 to 10	6	USB
1	310324	2000	1200	8 to 10	6	USB

		UPS - British standard (type G) input cord				
		Nominal power (VA)	Active power (W)	Back-up time (min)	Number of IEC C13 outlets	Communication ports
1	310325	600	360	8 to 10	4	-
1	310326	800	480	8 to 10	4	-
1	310327	1000	600	8 to 10	6	USB
1	310328	1500	900	8 to 10	6	USB
1	310329	2000	1200	8 to 10	6	USB

NOTE: The stated back-up times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

Keor SPX

Uninterruptible power supplies (UPS)

Characteristics

General characteristics

Nominal power (VA)	600	800	1000	1500	2000
Active power (W)	360	480	600	900	1200
Technology	Line interactive VI				
Waveform	Pseudo-sinusoidal				

Input characteristics

Input voltage	230 V				
Input frequency	50-60 Hz +/- 5Hz (autosensine)				
Input voltage range	162 V-290 V				

Output characteristics

Output voltage	220 /230/240V				
Output frequency (nominal)	50/60 Hz +/-1%				

Communication and management

Screen and signalling	1 on/off button and 1 LED for real-time control	1 on/off button and 3 LEDs for real-time control
Remote control	Available	


Mechanical characteristics

Dimensions H x W x D (mm)	142x101x279		182x130x320		
Net weight (kg)	4,2	4,9	8,2	10,4	10,6

Ambient conditions

Ambient operating temperature [°C]	0 to 40°C				
Relative humidity [%]	0 to 90%				
Noise at 1 m [dB]	< 40				

Multistandard outlets

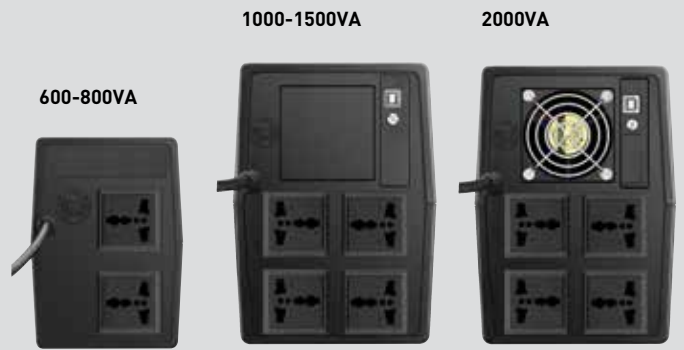

IEC C13 outlets

